

I.C.E.™ LEVELO

WEIGHT: 600 X 600

Perforated with Acoustic batt 1.35kg

Unperforated excluding batt 1.25kg

'Levelo' tiles mix and match in sizes of 1200 x 600, 600 x 600 and 1200 x 300 in 3.5mm perforation.

I.C.E. INNOVATIVE CEILING ENGINEERING



N.B. 2mm diagonal perforation also available.

- ICE tiles perforated open area varies from 10.64 to 43.8%.


NB: 1200 x 400 tile is 2mm perforation.

GRID SYSTEM

INTALOK grid eliminates gaps experienced with other "Lapped Systems"

SPECIAL FEATURE

Tile and Tee face is level giving a monolithic appearance.

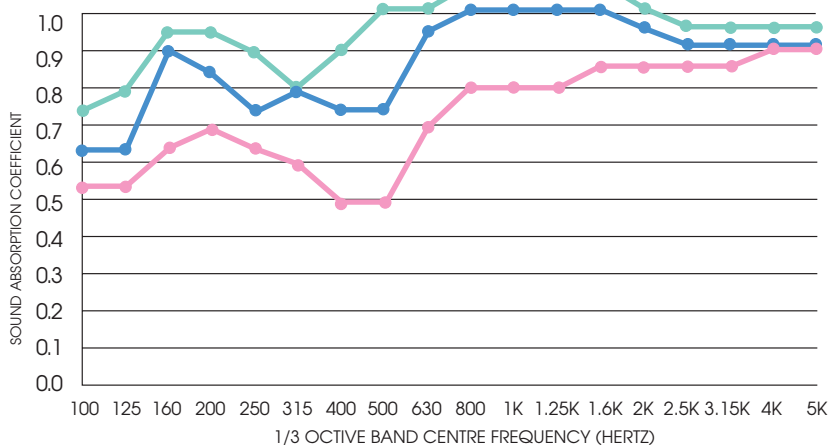


CURVE 1 - NRC 0.70
I.C.E. + 15 h/d F.Glass


CURVE 2 - NRC 0.85
I.C.E. + 15 h/h F.glass + 25 F.glass

CURVE 3 - NRC 1.00
15 h/d F.glass + 50 F.glass

NOTE: ALL TESTS TO: AS1045 - 1988 - TEST DATA AVAILABLE.

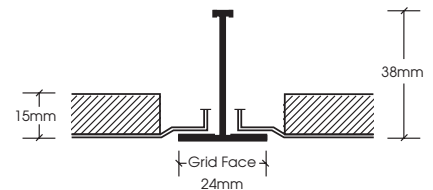

Standard perforation is 3.5mm with 2mm and 8mm (open area 43.8%) perforation also available

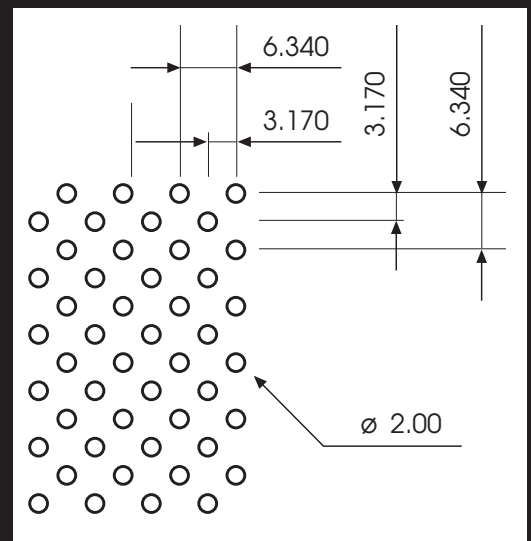

Easily Accessible Monolithic
Surface Appearance