




More Design Opportunity

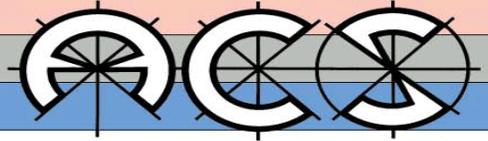

**ARCHITECTURAL
CEILING SYSTEMS** PTY
LTD

INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161

CEILINGS DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No 2 revised

CORULINE SPECIFICATION - PERFORATED **Standard Application**

Coruline metal strip ceiling panels shall be installed strictly in accordance with the manufacturer recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Generally, provide **ACS P/No 4** mat black finished universal carrier rails spaced 900mm apart commencing and finishing at a maximum of 150mm from the ends of the panels. Hangers shall be **ACS P/No 63** 25x25 angle compression hangers as supplied by the manufacturer and shall be fixed with a 12mm wafer head screw to purlins and **ACS P/No 4** carriers at a maximum of 1800mm centres.

Conceal fix perforated **Coruline** metal ceiling face panels, 160mm wide, by means of screws or rivets as recommended by the manufacturer through the fixing flange on one side of face panel.

Continue to install face panels applying edge pressure on each panel appropriate to achieve a firm fixing. (contact manufacturer for further details regarding fixing method). No rivets or other fixings shall be visible on the main body of the ceiling.

Perforated **Coruline** panels should be fixed in * **full lengths**, where possible or joined end to end with the face of a colour matched aluminium "T" section trim or H mould covering the meeting of each panel run. Ensure that the line of each panel flows through to the next bay of panels.

*** Maximum practical panel handling length – 6mtrs. subject to discussion.**

Face panels shall be Colorbond Zinalume 0.4mm BMT and shall be corrugated to provide 6 ribs per panel. All fixings and raw metal edges shall be concealed. **Coruline** face panels shall be perforated with 3mm diam. holes at 7mm centres in a diagonal pattern. Perforations shall cover a width of 120mm of each face panel leaving 40mm unperforated at the side junction of each of the panels.

Wall trims to be extruded aluminium *(**"L" / "W" shaped shadowline**) of baked enamel finish to match the colour of the panels.

Acoustic and thermal insulation, to a thickness of *(**50 / 75mm**) shall be black faced with non-woven scrim which is to be laid over **perforated** ceiling panels between the up stand legs of the carrier rails.

- * Standard Coruline face panels are as follows: -
Colorbond off-white over Zinalume steel of 0.40mm thickness (BMT).
- ** Please select option prior to printing specification.

Contact: Telephone: (08) 9271 0777 Website www.acsceilings.com.au

Sales Contacts: Rod@heafod.com.au Scott@heafod.com.au

Coruline metal strip ceiling is manufactured in Perth, Western Australia

Updated: 20/08/2019