




More Design Opportunity

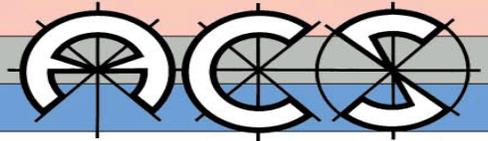

**ARCHITECTURAL
CEILING SYSTEMS** PTY LTD

INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161
CEILINGS DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No **1 revised**

CORULINE SPECIFICATION - UN-PERFORATED

Coruline metal strip ceiling panels shall be installed strictly in accordance with the manufacturer recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Generally, provide **ACS P/No 4** universal carrier rails spaced 900mm* apart and spanning not more than 1800mm* between hangers, for internal applications or spaced at 600mm centres and not spanning more than 1200mm between hangers for external soffit lining applications. Hangers shall be **ACS P/No 63** 25x25 angle compression hangers as supplied by the manufacturer and shall be fixed with a 12mm wafer head screw to purlins and **ACS P/No 4** carriers.

Conceal fix **Coruline** metal ceiling face panels, 160mm wide (nom), by means of screws or rivets as recommended by the manufacturer through the fixing flange on one side of face panel.

Plain(non perforated) **Coruline** panels should be fixed in ***full lengths**, where possible or joined end to end with the face of a colour matched aluminium **"T"** section trim or H mould covering the meeting of each panel run. Ensure that the line of each panel flows through to the next bay of panels.

***Maximum practical panel handling length – 6mtrs. subject to discussion.**

Continue to install face panels applying edge pressure on each panel appropriate to achieve a firm fixing. (contact manufacturer for further details regarding fixing method). No rivets or other fixings shall be visible on the main body of the ceiling.

Face panels shall be 'Colorbond' Zincolume 0.4mm (nom) BMT and shall be corrugated to provide 6 ribs per panel. All fixings and raw metal edges shall be concealed.

Acoustic and thermal insulation as specified by the client.

Wall trims to be extruded aluminium ***("L" / "W" shaped shadowline)** of powder coated finish to match the colour of the panels.

NOTES:

- * Security ceiling applications, i.e. recreation centres, may require carrier rails to be installed at 600mm centres, spans reduced considerably and face panel, "stitch" fixing to be implemented. Refer higher durability specifications.
- * Standard **Coruline** face panels are as follows: -
Colorbond off-white over Zincolume steel of 0.40mm (nom) thickness (BMT).
- * Please nominate radius prior to printing specification.
- * Please select option prior to printing specification.
- * Also available in aluminium based material.

Contact:

Telephone: (08) 9271 0777.

Website www.acsceilings.com.au

Sales Contacts:

Rod@heafod.com.au

Scott@heafod.com.au

Coruline metal strip ceiling is manufactured in Perth, Western Australia

Updated 20/08/2019