




More Design Opportunity

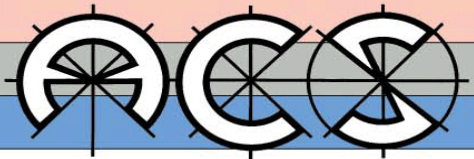

**ARCHITECTURAL
CEILING SYSTEMS** PTY
LTD

INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161

CEILING DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No **16**

LINEAR 5.

SPECIFICATION.

Linear 5 **metal strip ceiling** panels shall be installed strictly in accordance with the manufacturer's recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Provide **ACS P/N 4E** Carrier Rails, spaced at 1200mm apart suspended below upper supports using **ACS P/No. 63** 25mmx25mm PGI compression angle hangers and spanning not more than 1800mm between hangers. The carrier rails shall provide machine spaced and shaped clips to accept Linear 5 ceiling panels at exactly 100mm centres. The clipping face of the rail shall be Matt Black painted.

Linear 5 **metal ceiling** panels ***(non-perforated / bridge / band / fully micro-perforated)** shall be cold roll formed Colorbond Zincolume 0.4mm (nom) BMT. The panels shall have a purpose rolled profile flat faced square cornered appearance 81mm x 12mm spaced from each other leaving a 19mm gap.

Wall trims to be extruded aluminium ***("L" / "W" shaped shadowline)** angle of baked enamel finish colour to match the panels.

Acoustic and thermal insulation to the thickness ***(25 / 50 / 75mm)** shall be black faced with a non-woven scrim and shall be laid over the ceiling panels and between the up stand legs of the carrier rails.

NOTES:

- * **Please select one option in each case before printing specification.**
- * **The standard Colorbond colour is Colorbond off-white. Other Colorbond colour options are subject to availability.**
- * **Also available in Aluminium based material.**

Contacts:
Sales Contacts:

Telephone: (08) 9271 0777
alan@heafod.com.au

Fax: (08) 9272 2801
rod@heafod.com.au

Linear 5 metal strip ceiling is manufactured in Perth, Western Australia