




More Design Opportunity

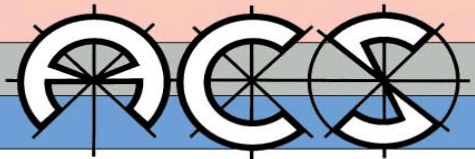

**ARCHITECTURAL
CEILING SYSTEMS** PTY
LTD

INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161

CEILING DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No **18**

SPAC DECKFORM.

SPECIFICATION.

SPAC Deckform sheeting shall be installed strictly in accordance with the manufacturer's recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Provide **ACS P/No 4F** Carrier rails, spaced at 1200mm apart, suspended below upper supports using **ACS P/No. 63** 25x25 PGI angle compression hangers and spanning not more than 1800mm between hangers. The carrier rails shall provide machine spaced and shaped clips to accept SPAC Deckform ceiling panels at exactly 150mm centres. The clipping face of the carrier rail shall be Matt Black painted.

SPAC Deckform **perforated** ceiling panels shall be cold roll formed Colorbond Zinalume 0.6mm (nom) BMT. The panels shall have a purpose rolled flat closed profile with central rib 11.0 x 0.50mm deep. Panels are to be profiled so as to provide a secure interlocking, inter-connecting assembly from panel to panel and carrier rail.

Acoustic and thermal insulation to the thickness ***(25 / 50 / 75mm)** shall be black faced with a non-woven scrim and shall be laid over the ceiling panels and between the up stand legs of the carrier rails.

Wall trims to be extruded Aluminium ***(‘L’ / ‘W’ shaped shadowline)** of baked enamel finish to match the colour of the panel.

Special Notes:

Top hat and flat notched carrier sections are formed from a standard 2.4 metre sheet size which may vary slightly in length. Therefore, when butt joining carrier sections it is essential that the exact 150mm module is maintained.

NOTES:

- * **Please select one option in each case before printing specification.**
- * **The standard colour is Colorbond Off-White. Other Colorbond options are subject to availability.**

Contacts:
Sales Contacts:

Telephone: (08) 9271 0777
alan@heafod.com.au

Fax: (08) 9272 2801
rod@heafod.com.au