




More Design Opportunity

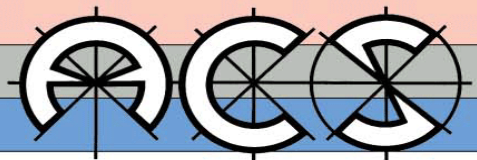

**ARCHITECTURAL
CEILING SYSTEMS** PTY
LTD
INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161
CEILINGS DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No **27**

PROFILE 230.

SPECIFICATION.

Profile 230 panels shall be installed strictly in accordance with the manufacturer's recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Provide **ACS P/No 16** cold roll formed Profile 230 panelling direct fixed to the support framing by means of Hex Head Tek screws at maximum 1200mm centres along the panel length.

ACS P/No 16A Commencement Clips shall be installed to accept the first panel in each run or bay.

The Commencement Clips shall be fixed to the support framing by means of Hex Head Tek screws.

Profile 230 panels shall be Colorbond Zinalume 0.4mm (nom)BMT.

All fasteners to be zinc or cadmium plated, isolate all dissimilar metals with an inert membrane.

Install matching colour finished flashings, corner moulds, purpose folded panels and sections as detailed.

THERMAL EXPANSION

0.36mm per meter length per 10 deg. C. change.

NOTES:

- * **The standard colour is Colorbond Off-White. Other Colorbond options are subject to availability.**

Contacts:
Sales Contacts:

Telephone: (08) 9271 0777
alan@heafod.com.au

Fax: (08) 9272 2801
rod@heafod.com.au

Profile 230 panels are manufactured in Perth, Western Australia