




More Design Opportunity

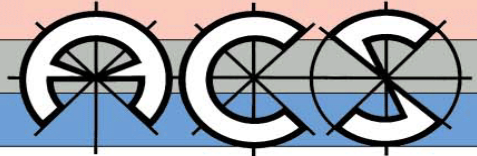

**ARCHITECTURAL
CEILING SYSTEMS** PTY LTD

INCORPORATED IN WESTERN AUSTRALIA
A.C.N. 008 782 161

CEILINGS DESIGN, MANUFACTURE
INSTALLATION & CONSULTANT SERVICES

Standard Specification No **26**

DECKFORM. **SPECIFICATION.**

Deckform shall be installed strictly in accordance with the manufacturer's recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Provide **ACS P/No 13** Top Hat carrier rails spaced at 1200mm apart, fixed to the support framing and spanning not more than 1500mm between supports.

The carrier rails shall provide machine spaced and shaped clips to accept Deckform cladding panels at exactly 150mm centres.

Deckform cladding panels shall be cold roll formed Colorbond Zinalume 0.75mm (nom) BMT.

The panels shall have a purpose rolled flat closed profile with a central rib 11.0 x 0.50mm deep; panels are to be profiled so as to provide a secure interlocking, interconnecting assembly from panel to panel and carrier rail.

Install matching colour finished flashings, corner moulds; purpose folded panels and sections as detailed.

Panel span chart note - caution, the spans shown below are correct in respect of structural ability. For best performance and appearance, carriers should be spaced at 1200mm centres along the panel lengths.

Special Notes:

Top hat and flat notched carrier sections are formed from a standard 2.4 metre sheet size which may vary slightly in length. Therefore, when butt joining carrier sections, it is essential that the exact 150mm module is maintained.

Nominal thickness	:	Fascia	:	Fascia	:	Soffit
	:	120Km/H wind	:	145Km/H wind	:	

0.8mm	:	2200	:	1950	:	1800
0.60mm	:	2050	:	1800	:	1700

* **The standard colour is Colorbond Off-White. Other Colorbond options are subject to availability.**

Contacts:

Sales Contacts:

Telephone: (08) 9271 0777

alan@heafod.com.au

Fax: (08) 9272 2801

rod@heafod.com.au

Deckform cladding panels are manufactured in Perth, Western Australia