




More Design Opportunity

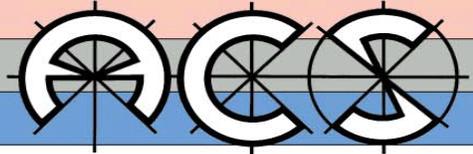

**ARCHITECTURAL  
CEILING SYSTEMS** PTY LTD

INCORPORATED IN WESTERN AUSTRALIA  
A.C.N. 008 782 161

CEILINGS DESIGN, MANUFACTURE  
INSTALLATION & CONSULTANT SERVICES

Standard Specification No.12

## **MINISTRIP BROADLINE.**

### **Band Perforated – Curved Carrier**

#### **SPECIFICATION.**

**Broadline metal strip ceiling** panels shall be installed strictly in accordance with the manufacturer recommendations and the installer shall be responsible for the neatness and strength of the overall installation.

Provide **ACS P/No 4A Curved** Carrier Rails, to the required radius, spaced at 915mm apart, suspended below upper supports using **ACS P/No 63**, 25mm x 25mm x 0.8mm PGI compression angle hangers and spanning not more than 1200mm between hangers. The Carrier Rails shall be pre-curved to the required radius and provide machine spaced and shaped clips to accept Broadline ceiling panels at exactly 75mm centres. The clipping face of the Carrier Rail shall be Matt Black painted. The carriers are to be installed in accurate alignment to form a smooth flowing curve, as set out in the drawings, when the face panels are installed.

Ministrip "**Broadline**" **metal ceiling** panels to be **Band perforated** with 2.28mm **Round Hole** perforations diagonally pitched at 7.76mm and shall be cold roll formed from 0.4mm (nom) BMT Colorbond Zinalume. The panels shall have a substantially flat face purpose rolled profile appearance, spaced from each other leaving a 7.5mm gap.

Wall trims to be extruded Aluminum \*["L" / "W" **shaped shadowline**] of baked enamel finish to match the colour of the panels fixed to the wall at max. 600mm centres.

Acoustic and Thermal insulation to the thickness \*[25 / 50 / 75mm] shall be black faced with a non-woven scrim and shall be laid over the ceiling panels and between the up stand legs of the carrier rails. The use of H.D.R's (Hold Down Rods) is recommended to prevent slippage of insulation down a ceiling slope. Ref. HDR specification.

#### **NOTES:**

- \* **Please select one option in each case before printing specification.**
- \* **The standard colour is Colorbond Off-White. Other Colorbond options are subject to availability.**

**Contacts:**  
**Sales Contacts:**

**Telephone: (08) 9271 0777**  
[alan@heafod.com.au](mailto:alan@heafod.com.au)

**Fax: (08) 9272 2801**  
[rod@heafod.com.au](mailto:rod@heafod.com.au)

**Ministrip Broadline metal strip ceiling is manufactured in Perth, Western Australia**